


Orthodontic

Precision Perfected

Our dental instrument is meticulously engineered to deliver unparalleled precision in every procedure. With advanced technology and superior craftsmanship, it empowers you to achieve exceptional outcomes with unwavering accuracy. Say farewell to guesswork and embrace the confidence of knowing that your patients are receiving the best possible treatment.

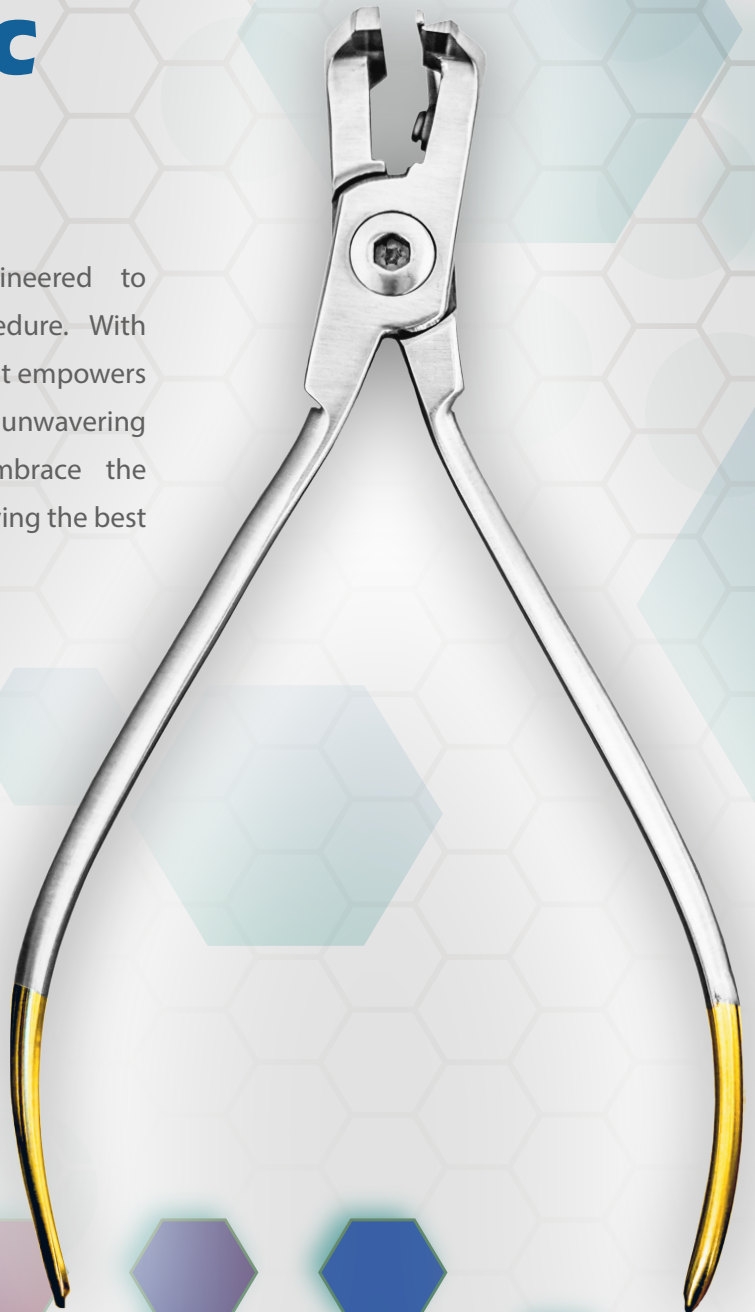

XtremeCut



Tusk Wire Cutter
48-125-11
11 cm - 4 1/4"



Tusk Wire Cutter
48-126-12
12.5 cm - 5"



Tusk Wire Cutter
48-127-13
13 cm / 5"

XtremeCut



Tusk Wire Cutter
48-128-11
11.5 cm / 4 1/2"



Schwarz
Fig. 1 Wire Bending Pliers
48-139-13
13 cm - 5 1/2"
Until 0.7 mm / .028" Ø max.



Tusk Wire Bending Pliers
48-147-13
13.5 cm - 5 1/4"
Until 0.7 mm / .028" Ø max.



Angle Modified

48-163-12

12.5 cm - 5"
Until 0.7 mm / .028" Ø max.

Wire Bending Pliers



Weingart
Fig. 2

48-193-13

13 cm - 5"

Wire Seizing and
Ligature Pliers



Tusk

48-205-12

12.5 cm - 4"

For soft wire from min. 0.25 mm / 0.10"
until 0.40 mm / .016" Ø max.

Ligature Cutter and Distal End Cutter, AcuteGrip



Tusk Distal End Cutter

48-207-12


12.5 cm - 5"
For hard wire from min. 0.36 mm / 0.14"
until 0.46 mm / .018" Ø max.
For soft wire from min. 0.30 mm / 0.12"
until 0.64 mm / .025" Ø max.



Tusk Distal End Cutter

48-208-14

14 cm - 5½"
For hard wire from min. 0.46 mm / 0.18"
until 0.50 mm / .020" Ø max.
For steel wire from min. 0.40 x 0.40 mm / 0.16" x 0.16"
until 0.43 x 0.64 mm / .017 x .025" Ø max.



How Band Removing Pliers

48-221-14 14.5 cm - 5³/₄" Fig. 1

48-222-14 14.5 cm - 5³/₄" Fig. 2

48-223-14 14.5 cm - 5³/₄" Fig. 3



Peeso

48-233-12

12 cm - 4³/₄"

Contouring Pliers



48-254-00

Distal end cutter - Flush cut with safety hold
Wire until .022" x 0.28" max.



48-258-00

Pin and ligature cutter
Soft wire until .015" Ø max.



48-259-00

Mini pin and ligature cutter
Soft wire until .012" max.



48-260-00

Ligature cutter 45°
Soft wire until .015" Ø max.



Loop and Arch Forming Pliers

48-261-00

Ball hook crimping
pliers



Band Seating Pliers

48-277-00

Band seating pliers



Band Removing Pliers

48-278-00

Angled direct bond remover



Fig. 2

48-283-13

13.5 cm - 5½"
Placing Tweezers



Fig. 6

48-287-14

14 cm - 5½"
Placing Tweezers



Fig. 7

48-288-14

14 cm - 5½"
2.5 mm tip
Placing Tweezers



Fig. 8

48-289-14

14.5 cm - 5¾"
3.0 mm tip
Placing Tweezers



Band Pusher

	48-306-13	13.5 cm - 5½"
	48-307-13	13.5 cm - 5½"
	48-308-13	13.5 cm - 5½"
	48-309-13	13.5 cm - 5½"
	48-310-13	13.5 cm - 5½"
	48-311-13	13.5 cm - 5½"
	48-312-13	13.5 cm - 5½"



Tusk
48-329-00
Ligature tucker




48-335-00
Wire bending instrument
Until 0.56 x 0.7 mm /
.022 x .028" max.



Bracket Height Gauge - Swivel Head
48-298-00
For four bracket height dimensions
3.5, 4.0, 4.5 and 5.0 mm



Smaha Ligature Forceps
48-338-13
13.5 cm - 5¼"
Hole tip

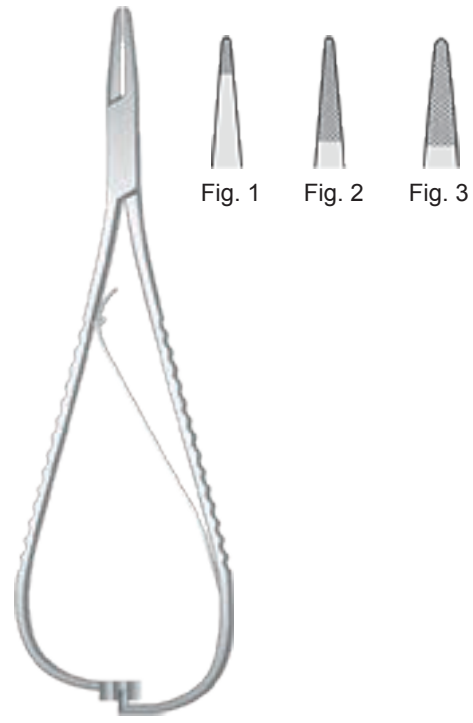

Mathieu - Slim Tip Ligature Forceps

48-340-14	14 cm / 5½"	Fig. 1
48-341-14	14 cm / 5½"	Fig. 2
48-342-14	14 cm / 5½"	Fig. 3



Halstead - Mosquito (Fine Tip)

48-345-12	12 cm -¾"	I
48-346-12	12 cm -¾"	J

Kemp House, 160 City Road, London, EC1V 2NX, United Kingdom
info@tuskuk.com | www.tuskuk.com

Imported and Distributed by Prodent

No 637, 5th main, 17th Cross, Indiranagar 2nd Stage, Bangalore 560 038

Info@prodent.in | +91 87920 02278, 98805 11087 | Customer care no: +91 80 2526 6222

The logo for Tusk Instruments Ltd. features a stylized white icon of a tusk on the left, followed by the word "tusk" in a bold, lowercase, sans-serif font.

TUSK INSTRUMENTS LTD. [UK]